ZQ210, ZQ220 ZQ112, ZQ120

ESC/POS Code Pages



Reference Guide

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corporation, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. © 2021 Zebra Technologies Corporation and/or its affiliates. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements.

For further information regarding legal and proprietary statements, please go to:

SOFTWARE: <u>zebra.com/linkoslegal</u> COPYRIGHTS: <u>zebra.com/copyright</u> WARRANTY: <u>zebra.com/warranty</u>

END USER LICENSE AGREEMENT: zebra.com/eula

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.


Publication Date

August 13, 2021

How to Read the Code Page Charts

This guide is a reference for printing with ZQ210, ZQ220, ZQ112, and ZQ120 printers via ESC-POS. It lists the available Code Pages that can be used when printing with ESC-POS language.

The descriptions of objects in the block are below.

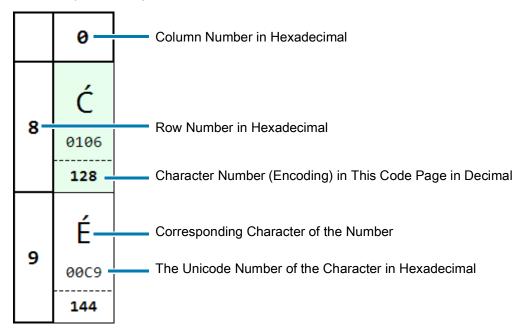

Row number is the first number of hexadecimal character number while column number is the second number. For example, the hexadecimal number of character number 128 is 0x80, so the row number is 8, the column number is 0.

The background color in green indicates the character is different from the character of same number in code page 437, which is the code page used for the United States and Europe.

The characters from 0 to 127 in each code page are the same with ASCII encoding. The character numbers (encodings) from 0 to 31 are for control characters.

How to Read the Code Page Charts

The ASCII characters from 32 to 127 are as below.

	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F
2		!	"	#	\$	%	&	1	()	*	+	,	-		/
	0020	0021	0022	0023	0024	0025	0026	0027 	0028	0029	002A	002B	002C	002D	002E	002F
	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47
	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	?
3	0030	0031	0032	0033	0034	0035	0036	0037	0038	0039	003A	003B	003C	003D	003E	003F
	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
4	@	Α	В	С	D	Е	F	G	Н	I	J	K	L	М	N	О
4	0040	0041	0042	0043	0044	0045	0046	0047	0048	0049	004A	004B	004C	004D	004E	004F
	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79
5	Р	Q	R	S	Т	U	٧	W	Χ	Υ	Z	[١]	٨	_
5	0050	0051	0052	0053	0054	0055	0056	0057	0058	0059	005A	005B	005C	005D	005E	005F
	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
	`	a	b	С	d	e	f	g	h	i	j	k	1	m	n	О
6	0060	0061	0062	0063	0064	0065	0066	0067	0068	0069	006A	006B	006C	006D	006E	006F
	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111
7	р	q	r	S	t	u	٧	W	х	у	Z	{		}	~	
'	0070	0071	0072	0073	0074	0075	0076	0077	0078	0079	007A	007B	007C	007D	007E	007F
	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127

Page 0 – 437 (USA, Standard Europe)

Page 0 – 437 (USA, Standard Europe)

Code Page Name: USA, Standard Europe

Code Page Number: 437

Command: <ESC>t<0>

	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F
8	Ç 00C7	Ü 00FC	é 00E9	â	ä 00E4	à 00E0	å 00E5	Ç 00E7	ê 00EA	ë 00EB	è 00E8	Ï 00EF	î 00ee) 00EC	Ä 00C4	Å 00C5
	128 É	129	130	131	132	133	134	135	136	137 Ö	138	139	140	141	142 D.	143 f
9	-	æ	Æ	ô	Ö	Ò	û	ù	ÿ		Ü	¢	£	¥	Pt	
	00C9 1	00E6 	00C6 146	00F4 147	00F6 148	00F2 1	00FB 150	00F9 151	00FF 152	00D6 153	00DC 154	00A2 155	00A3 156	00A5 157	20A7 158	0192 159
	144	145	140		140	145	130		- 132	- 133		133	130	137	150	
A	á	ĺ	ó	ú	ñ	Ñ	a	0	خ	L	¬	1/2	1/4	i	«	»
A	00E1	00ED	00F3	00FA	00F1	00D1	00AA	00BA	00BF	2310	00AC	00BD	00BC	00A1	00AB	00BB
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В	***			-	4	4	-	٦	٦	4		٦	_		╛	コ
"	2591	2592	2593	2502	2524	2561	2562	2556	2555	2563	2551	2557	255D	255C	255B	2510
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
c	L		_	F	_	+	-	F	L	F	_L	T	-	_	+	
	2514	2534	252C	251C	2500	253C	255E	255F	255A	2554	2569	2566	2560	2550	256C	2567
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
		_	Т	L	L	F	Γ	+	+		Г		-			-
D	2568	2564	2565	2559	2558	2552	2553	256B	256A	2518	250C	2588	2584	258C	2590	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
	α	ß	Γ	π	Σ	σ	μ	τ	Φ	Θ	Ω	δ	8	φ	ε	\cap
E	03B1	00DF	0393	03C0	03A3	03C3	00B5	03C4	03A6	0398	03A9	03B4	221E	03C6	03B5	2229
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
F	≡	±	≥	≤	ſ	J	÷	≈	0			$\sqrt{}$	n	2		
[2261	00B1	2265	2264	2320	2321	00F7	2248	00B0	2219	00B7	221A	207F	00B2	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 2 – 850 (Multilingual)

Code Page Name: Multilingual

Code Page Number: 850

Command: <ESC>t<2>

	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F
	Ç	ü	é	â	ä	à	å	ç	ê	ë	è	ï	î	ì	Ä	Å
8	99C7	00FC	00E9	00E2	00E4	00E0	00E5	00E7	00EA	00EB	00E8	00EF	00EE	00EC	00C4	00C5
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
	É	æ	Æ	ô	ö	ò	û	ù	ÿ	Ö	Ü	ø	£	Ø	×	f
9	00C9	00E6	00C6	00F4	00F6	00F2	00FB	00F9	00FF	00D6	00DC	00F8	00A3	00D8	00D7	0192
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
A	á	í	ó	ú	ñ	Ñ	<u>a</u>	ō	¿	®	٦.	1/2	1/4	i	«	>>
A	00E1	00ED	00F3	00FA	00F1	00D1	00AA	00BA	00BF	00AE	00AC	00BD	00BC	00A1	00AB	00BB
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В		**************************************			4	Á	Â	À	©	4		ח	Ш	¢	¥	٦
	2591	2592	2593	2502	2524	00C1	00C2	00C0	00A9	2563	2551	2557	255D	00A2	00A5	2510
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
c	L	Τ	Т	ŀ	_	+	ã	Ã	L	F	<u>JL</u>	ī	╠	=	#	¤
	2514	2534	252C	251C	2500	253C	00E3	00C3	255A	2554	2569	2566	2560	2550	256C	00A4
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
	ð	Đ	Ê	Ë	È	1	Í	Î	Ϊ	J	Г			1	Ì	
D	00F0	00D0	00CA	00CB	00C8	0131	00CD	00CE	00CF	2518	250C	2588	2584	00A6	00CC	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
	Ó	ß	Ô	Ò	õ	õ	μ	þ	Þ	Ú	Û	Ù	ý	Ý	-	-
E	00D3	00DF	00D4	00D2	00F5	00D5	00B5	00FE	00DE	00DA	00DB	00D9	00FD	00DD	00AF	00B4
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
		±	=	3/4	9	§	÷	,	o		•	1	3	2	•	
F	00AD	00B1	2017	00BE	00B6	00A7	00F7	00B8	00В0	00A8	00B7	00B9	00B3	00B2	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 3 – 860 (Portuguese)

Code Page Name: Portuguese

Code Page Number: 860

Command: <ESC>t<3>

	0	1	2	3	4	5	6	7	8	9	Α	В	C	D	E	F
	Ç	ü	é	â	ã	à	Á	ç	ê	Ê	è	Í	Ô	ì	Ã	Â
8	00C7	00FC	00E9	00E2	00E3	00E0	00C1	00E7	00EA	00CA	00E8	00CD	00D4	00EC	00C3	00C2
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
9	É	À	È	ô	õ	Ò	Ú	ù	Ì	õ	Ü	¢	£	Ù	Ps	Ó
9	00C9	00C0	00C8	00F4	00F5	00F2	00DA	00F9	00CC	00D5	00DC	00A2	00A3	00D9	20A7	00D3
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
A	á	í	ó	ú	ñ	Ñ	<u>a</u>	<u>o</u>	¿	Ò	٦.	1/2	1/4	i	«	>>
	00E1	00ED	00F3	00FA	00F1	00D1	00AA	00BA	00BF	00D2	00AC	00BD	00BC	00A1	00AB	00BB
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В		**************************************			-	4	1	11	ī	1		٦	Ш	ال	Ī	٦
٦	2591	2592	2593	2502	2524	2561	2562	2556	2555	2563	2551	2557	255D	255C	255B	2510
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
С	L	Т	Т	ŀ	_	+	F	╟	L	F	╨	ī	╠	=	#	<u></u>
	2514	2534	252C	251C	2500	253C	255E	255F	255A	2554	2569	2566	2560	2550	256C	2567
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
D	1	₹	π	IL	L	Ē	ΙΓ	#	+	J	Г			ı	I	
	2568	2564	2565	2559	2558	2552	2553	256B	256A	2518	250C	2588	2584	258C	2590	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
_	α	ß	Γ	π	Σ	σ	μ	τ	Φ	Θ	Ω	δ	∞	ф	ε	n
E	03B1	00DF	0393	03C0	03A3	03C3	00B5	03C4	03A6	0398	03A9	03B4	221E	03C6	03B5	2229
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
_	=	±	<u>></u>	<u><</u>	ſ	J	÷	≈	o			√	n	2		
F	2261	00B1	2265	2264	2320	2321	00F7	2248	00В0	2219	00B7	221A	207F	00B2	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 4 – 863 (Canadian - French)

Code Page Name: Canadian - French

Code Page Number: 863

Command: <ESC>t<4>

	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F
	Ç	ü	é	â	Â	à	g	ç	ê	ë	è	ï	î	_	À	§
8	00C7	00FC	00E9	00E2	00C2	00E0	00B6	00E7	00EA	00EB	00E8	00EF	00EE	2017	00C0	00A7
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
	É	È	Ê	ô	Ë	Ϊ	û	ù	¤	Ô	Ü	¢	£	Ù	Û	f
9	00C9	00C8	00CA	00F4	00CB	00CF	00FB	00F9	00A4	00D4	00DC	00A2	00A3	00D9	00DB	0192
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
Α	1	,	ó	ú			3	-	Î	_	٦.	1/2	1/4	3/4	«	>>
A	00A6	00B4	00F3	00FA	00A8	00B8	00B3	00AF	00CE	2310	00AC	00BD	00BC	00BE	00AB	00BB
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В		**************************************			4	4	1	ור	ī	4		ī	Ш	ال	Ī	٦
	2591	2592	2593	2502	2524	2561	2562	2556	2555	2563	2551	2557	255D	255C	255B	2510
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
С	L	Τ	Т	ŀ	_	+	Ļ	╟	L	F	业	ī	ŀ	=	#	<u></u>
	2514	2534	252C	251C	2500	253C	255E	255F	255A	2554	2569	2566	2560	2550	256C	2567
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
D	Т	₹	π	IL	Ŀ	Ē	ΙΓ	#	+	L	Г		•	ı	ı	
U	2568	2564	2565	2559	2558	2552	2553	256B	256A	2518	250C	2588	2584	258C	2590	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
_	α	ß	Γ	π	Σ	σ	μ	τ	Φ	Θ	Ω	δ	∞	ф	ε	Λ
E	03B1	00DF	0393	03C0	03A3	03C3	00B5	03C4	03A6	0398	03A9	03B4	221E	03C6	03B5	2229
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
F	=	±	<u>></u>	<u><</u>	ſ	J	÷	≈	o	•	•	✓	n	2		
[2261	00B1	2265	2264	2320	2321	00F7	2248	00B0	2219	00B7	221A	207F	00B2	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 5 – 865 (Nordic)

Code Page Name: Nordic

Code Page Number: 865

Command: <ESC>t<5>

	0	1	2	3	4	5	6	7	8	9	Α	В	v	D	E	F
	Ç	ü	é	â	ä	à	å	ç	ê	ë	è	ï	î	ì	Ä	Å
8	00C7	00FC	00E9	00E2	00E4	00E0	00E5	00E7	00EA	00EB	00E8	00EF	00EE	00EC	00C4	00C5
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
9	É	æ	Æ	ô	ö	ò	û	ù	ÿ	Ö	Ü	ø	£	Ø	Rs	f
9	00C9	00E6	00C6	00F4	00F6	00F2	00FB	00F9	00FF	00D6	00DC	00F8	00A3	00D8	20A7	0192
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
A	á	í	ó	ú	ñ	Ñ	<u>a</u>	<u>o</u>	¿	-	٦.	1/2	1/4	i	«	¤
^	00E1	00ED	00F3	00FA	00F1	00D1	00AA	00BA	00BF	2310	00AC	00BD	00BC	00A1	00AB	00A4
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В		**************************************			4	4	1	11	ī	4		٦	Ш	ال	Ī	٦
"	2591	2592	2593	2502	2524	2561	2562	2556	2555	2563	2551	2557	255D	255C	255B	2510
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
С	L	Т	Т	ŀ	_	+	Ļ	╟	L	F	<u>JL</u>	ī	ŀ	=	#	工
`	2514	2534	252C	251C	2500	253C	255E	255F	255A	2554	2569	2566	2560	2550	256C	2567
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
D	Т	₹	π	IL	Ŀ	Ē	ΙΓ	#	+	L	Г		•	ı	ı	
ן י	2568	2564	2565	2559	2558	2552	2553	256B	256A	2518	250C	2588	2584	258C	2590	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
_	α	ß	Γ	π	Σ	σ	μ	τ	Φ	Θ	Ω	δ	∞	ф	ε	n
E	03B1	00DF	0393	03C0	03A3	03C3	00B5	03C4	03A6	0398	03A9	03B4	221E	03C6	03B5	2229
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
F	=	±	<u>></u>	<u><</u>	ſ	J	÷	≈	o			√	n	2	•	
•	2261	00B1	2265	2264	2320	2321	00F7	2248	00В0	2219	00B7	221A	207F	00B2	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 16 – 1252 (Latin 1)

Code Page Name: Latin 1

Code Page Number: 1252

Command: <ESC>t<16>

	0	1	2	3	4	5	6	7	8	9	Α	В	C	D	E	F
8	€ 20AC	0081	, 201A	f 0192	" 201E	2026	† 2020	‡ 2021	^ 02C6	% 0	Š 0160	(2039	Œ 0152	008D	Ž 017D	008F
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
		,	,	ıı .	"	•	_	_	~	тм	š	>	œ		ž	Ÿ
9	0090	2018	2019	201C	201D	2022	2013	2014	02DC	2122	0161	203A	0153	009D	017E	0178
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
		i	¢	£	¤	¥		§		©	a	«	٦		®	_
Α	00A0	00A1	00A2	— 00А3	00A4	00A5	І 00А6	00A7	00A8	00A9	00AA	00AB	00AC	00AD	00AE	00AF
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
	0		2	3	,					1	0		1/4	1/2	3/4	
В	OODO	±	0000	0002	00B4	μ	9	00B7	د 00B8	OORO	00BA	»>		92 00BD		¿ 00BF
	00B0 176	00B1 	00B2 178	00B3 	180	00B5 181	00B6 	183	184	00B9 	186	00BB 	00BC 	189	00BE 	191
c	À	Á	Â	Ã	Ä	Å	Æ	Ç	È	É	Ê	Ë	Ì	Í	Î	Ϊ
	00C0	00C1	00C2	00C3	00C4	00C5	00C6	00C7	00C8	00C9	00CA	00CB	00CC	00CD	00CE	00CF
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
	Đ	Ñ	Ò	Ó	Ô	Õ	Ö	×	Ø	Ù	Ú	Û	Ü	Ý	Þ	ß
D	00D0	00D1	00D2	00D3	00D4	00D5	00D6	00D7	00D8	00D9	00DA	00DB	00DC	00DD	00DE	00DF
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
	à	á	â	ã	ä	å	æ	ç	è	é	ê	ë	ì	í	î	ï
E	00E0	00E1	00E2	00E3	00E4	00E5	00E6	90E7	00E8	00E9	00EA	00EB	00EC	00ED	00EE	00EF
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
	*	æ	à	<u> </u>	â	~	ä		~	. N.	./.	^		4	h	
F	ð	ñ	Ò	ó	ô	õ	Ö	÷	Ø	ù	ú	û	ü	ý	þ	ÿ
	00F0 240	00F1 241	00F2 242	00F3 243	00F4 244	00F5 245	00F6 246	00F7 247	00F8 248	00F9 249	00FA 250	00FB 251	00FC 	00FD 253	00FE 254	00FF 255
	240	241	242	243	244	243	240	24/	240	243	250	251	252	255	234	233

Page 17 – 866 (Cyrillic 2)

Code Page Name: Cyrillic 2

Code Page Number: 866

Command: <ESC>t<17>

	0	1	2	3	4	5	6	7	8	9	Α	В	C	D	E	F
8	A 0410	Б	B 0412	Г 0413	Д ₀₄₁₄	E 0415	Ж 0416	3	И 0418	Й ₀₄₁₉	K 041A	Л 041B	M 0410	H 041D	O 041E	П 041F
9	P 0420	0421	130 T 0422	y 0423	Ф 0424	X 0425	134	135	0428 152	137 Щ 0429	ъ 042A	139 Ы 0428	140 b 0420	9 042D	142 HO 042E	9 942F
А	a 0430	6 0431	B 0432	Г 0433	Д 0434	e 0435	Ж 0436	3 0437	И 0438	Й 0439	K 043A	Л 043B	M 043C	H 043D	O 043E	□ 043F
В	2591 176	2592 177	2593 178	2502 179		⊒ 2561 181	_ 2562 182	7 2556 183	2555 184	⊒ 2563 185	2551 186	7 2557 187	255D 188		255B	2510 191
С	2514 192	 2534 193	252C		 2500 196	 253C	255E	255F 199	 255A 200	2554 201	_ <u> </u> 2569 202	2566 203	2560 294	<u>2550</u>	256C 206	<u>⊥</u> 2567 207
D	 2568 208		7 2565 210	2559 211	2558 212	2552 213	2553 214	256B	256A	 2518 217	Г 250C 218	2588 219	2584 220	258C	2590 222	2580 223
E	p ₀₄₄₀ 224	C 0441 225	T 0442 226	y ₀₄₄₃ 227	ф 0444 228	X 0445 229	Ц 0446 230	Ч 0447 231	Ш 0448 232	Щ 0449 233	Ъ 044A 234	Ы 044B 235	Ь 044C 236	Э 044D 237	Ю 044E 238	Я 044F 239
F	Ë 0401 240	ë ⁰⁴⁵¹	e 0404 242	6 0454 243	Ï 0407 244	Ï 0457 245	ў 040Е 246	ў 045E 247	O 00B0 248	2219 249	• 00B7 250	√ 221A 251	No 2116 252	Ø 00A4 253	25A0 254	00A0 255

Page 18 – 852 (Latin 2)

Code Page Name: Latin 2

Code Page Number: 852

Command: <ESC>t<18>

	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F
8	Ç 00C7	Ü 00FC	é 00E9	â	ä 00E4	ů 016F	Ć	Ç 00E7	}	ë _{00EB}	Ő	ő ₀₁₅₁	î 00EE	Ź ₀₁₇₉	Ä 00C4	Ć
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
9	É	Ĺ	ĺ	ô	ö	Ľ	ľ	Ś	ś	Ö	Ü	Ť	ť	Ł	×	č
	00C9	0139	013A	00F4	00F6	013D	013E	015A	015B	00D6	00DC	0164	0165	0141	00D7	010D
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
A	á	ĺ	ó	ú	Ą	ą	Ž	ž	Ę	ę	٦	ź	Č	ş	«	»
	00E1	00ED	00F3	00FA	0104	0105	017D	017E	0118	0119	00AC	017A	010C	015F	00AB	00BB
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В					4	Á	Â	Ě	Ş	4		٦		Ż	Ż	7
	2591 176	2592 177	2593 178	2502 179	2524 180	00C1 181	00C2 182	011A 183	015E 184	2563 185	2551 186	2557 187	255D 188	017B 189	017C 	2510 191
	1/6	1//	1/6	1/3	100	101	102	183	104	103	100	187	100	183	150	191
С	L		\top	F	_	+	Ă	ă	L	Г		┰	F	_	#	¤
	2514	2534	252C	251C	2500	253C	0102	0103	255A	2554	2569	2566	2560	2550	256C	00A4
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
	đ	Ð	Ď	Ë	ď	Ň	Í	Î	ě		Г		_	Ţ	Ů	-
D	0111	0110	010E	00CB	010F	0147	00CD	00CE	011B	2518	250C	2588	2584	0162	016E	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
	Ó	ß	ô	Ń	ń	ň	Š	š	Ŕ	Ú	ŕ	Ű	ý	Ý	ţ	,
E	00D3	00DF	00D4	0143	0144	0148	0160	0161	0154	00DA	0155	0170	00FD	00DD	0163	00B4
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
		"	(>)	§	÷	5	0			ű	Ř	ř		
F	00AD	02DD	Ø2DB	02C7	02D8	00A7	00F7	00B8	00B0	00A8	02D9	0171	0158	0159	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 19 – 858 (Euro)

Code Page Name: Euro

Code Page Number: 858

Command: <ESC>t<19>

	0	1	2	3	4	5	6	7	8	9	Α	В	C	D	E	F
	Ç	ü	é	â	ä	à	å	ç	ê	ë	è	ï	î	ì	Ä	Å
8	00C7	00FC	00E9	00E2	00E4	00E0	00E5	00E7	00EA	00EB	00E8	00EF	00EE	00EC	00C4	00C5
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
	É	æ	Æ	ô	ö	ò	û	ù	ÿ	Ö	Ü	ø	£	Ø	×	f
9	00C9	00E6	00C6	00F4	00F6	00F2	00FB	00F9	00FF	00D6	00DC	00F8	00A3	00D8	00D7	0192
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
	á	í	ó	ú	ñ	Ñ	<u>a</u>	ō	¿	®	٦.	1/2	1/4	i	**	>>
Α	00E1	00ED	00F3	00FA	00F1	00D1	00AA	00BA	00BF	00AE	00AC	00BD	00BC	00A1	00AB	00BB
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В		**************************************			-	Á	Â	À	©	4		٦	Ш	¢	¥	٦
В	2591	2592	2593	2502	2524	00C1	00C2	00C0	00A9	2563	2551	2557	255D	00A2	00A5	2510
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
c	L	Т	Т		_	+	ã	Ã	L	F	<u>II</u>	ī	ŀ	=	#	¤
	2514	2534	252C	251C	2500	253C	00E3	00C3	255A	2554	2569	2566	2560	2550	256C	00A4
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
	ð	Đ	Ê	Ë	È	€	Í	Î	Ϊ	L	Γ			1	Ì	
D	00F0	00D0	00CA	00CB	00C8	20AC	00CD	00CE	00CF	2518	250C	2588	2584	00A6	00CC	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
	Ó	ß	Ô	Ò	õ	õ	μ	þ	Þ	Ú	Û	Ù	ý	Ý	-	-
E	00D3	00DF	00D4	00D2	00F5	00D5	00B5	00FE	00DE	00DA	00DB	00D9	00FD	00DD	00AF	00B4
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
		±	=	3/4	g	§	÷		o			1	3	2		
F	00AD	00B1	2017	00BE	00B6	00A7	00F7	00B8	00В0	00A8	00B7	00B9	00B3	00B2	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 28 – 1251 (Cyrillic)

Code Page Name: Cyrillic

Code Page Number: 1251

Command: <ESC>t<28>

	0	1	2	3	4	5	6	7	8	9	Α	В	C	D	E	F
8	Ъ 0402	Ć 0403	, 201A	Ć 0453	" 201E	2026	† 2020	‡ 2021	€ 20AC	%0 2030	Љ 0409	(2039	Њ 040A	K 0400	Б 040В	Џ 040F
9	ћ 0452	2018	2019	201C	201D	2022		2014	0098	TM 2122	Љ 0459 154	> 203A	њ 045A 156	K 045C	ћ 0458	045F 159
А	00A0 160	ў 040Е 161	ў 045Е 162	J 0408 163	Ø 00A4 164	0490 165	 	§ 00A7 167	Ë 0401 168	© 00A9 169	E 0404 170	« 00AB 171	90AC 172	00AD	@ 00AE 174	Ï 0407 175
В	0 00B0	± 00B1	I 0406	j 0456 179	Ґ 0491 180	µ 0085	90B6	00B7	ë 0451	Nº 2116	6 0454	>> 00BB	j 0458	S 0405	S 0455	j 0457 191
С	A 0410	Б 0411 193	B 0412	Г 0413	Д 0414 196	E 0415	Ж 0416	3 ₀₄₁₇	√ 0418	Й 0419	K 041A	Л 041B 203	M 041C	H 041D	O 041E	041F
D	P 0420 208	0421 209	7 0422 210	y 0423 211	Ф 0424 212	X 0425 213	Ц 0426 214	Ч 0427 215	0428 216	Щ 0429 217	Ъ 042A 218	Ы 042B 219	b 0420 220	Э 042D	Ю 042E 222	Я 042F
E	a ₀₄₃₀	6 0431 225	B 0432 226	Г 0433 227	Д 0434 228	e 0435 229	Ж 0436 230	3 0437 231	И 0438 232	Й 0439 233	K 043A 234	Л 043B 235	M 043C 236	H 043D 237	O 043E 238	П 043F 239
F	p 0440 240	C 0441 241	T 0442 242	y 0443 243	ф 0444 244	X 0445 245	Ц 0446 246	9447 247	Ш 0448 248	Щ 0449 249	Ъ 044A 250	Ы 0448 251	Ь 044C 252	9 044D 253	Ю 044E 254	Я ^{044ғ} 255

Page 36 – 855 (Cyrillic)

Code Page Name: Cyrillic

Code Page Number: 855

Command: <ESC>t<36>

	0	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F
	ħ	Ъ	ŕ	ŕ	ë	Ë	€	ε	s	S	i	I	ï	Ϊ	j	J
8	0452	0402	0453	0403	0451	0401	0454	0404	0455	0405	0456	0406	0457	0407	0458	0408
	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
	Љ	Љ	њ	Ь	ħ	Ћ	Ŕ	Ŕ	ў	ў	Ų	Ų	Ю	Ю	ъ	Ъ
9	0459	0409	045A	040A	045B	040B	045C	040C	045E	040E	045F	040F	044E	042E	044A	042A
	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
	а	Α	6	Б	ц	Ц	Д	Д	е	Е	ф	Φ	Г	Г	«	>>
Α	0430	0410	0431	0411	0446	0426	0434	0414	0435	0415	0444	0424	0433	0413	00AB	00BB
	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
В	***	**************************************			4	x	Х	и	И	4		ח	Ш	й	Й	٦
В	2591	2592	2593	2502	2524	0445	0425	0438	0418	2563	2551	2557	255D	0439	0419	2510
	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
С	L	Τ	Т	+	_	+	К	K	L	F	业	ī	╠	=	#	¤
	2514	2534	252C	251C	2500	253C	043A	041A	255A	2554	2569	2566	2560	2550	256C	00A4
	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
	Л	Л	М	М	н	Н	0	0	п	١	Г			П	Я	
D	043B	041B	043C	041C	043D	041D	043E	041E	043F	2518	250C	2588	2584	041F	044F	2580
	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
_	Я	р	Р	С	С	т	Т	у	у	ж	Ж	В	В	ь	Ь	Nº
E	042F	0440	0420	0441	0421	0442	0422	0443	0423	0436	0416	0432	0412	044C	042C	2116
	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
_		Ы	Ы	3	3	ш	Ш	Э	Э	щ	Щ	ч	Ч	§	•	
F	00AD	044B	042B	0437	0417	0448	0428	044D	042D	0449	0429	0447	0427	00A7	25A0	00A0
	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

Page 48 – 28605 (Latin 9)

Code Page Name: Latin 9

Code Page Number: 28605

Command: <ESC>t<48>

	0	1	2	3	4	5	6	7	8	9	Α	В	C	D	E	F
8	0080	0081 129	0082	0083	0084 132	0085 133	0086	0087 135	0088 136	0089	008A	008B	008C	008D	008E	008F
9	0090	0091	0092	0093	0094	0095 149	0096	0097 151	0098 152	0099	009A	009B	009C	009D	009E	009F
А	00A0 160	i 00A1 161	Ç 00A2	£ 00A3	€ 20AC	¥ 00A5	Š 0160	§ 00A7	Š 0161	© 00A9	а 00АА 170	« 00AB	90AC	00AD	® 00AE	— 00AF 175
В	0 00B0	± 00B1	2 00B2	3 00B3	Ž 017D	µ 0085	90B6	00B7	Ž 017E	1 00B9	O 00BA 186	» 00BB	Œ 0152	0153	Ÿ 0178	¿ 00BF
С	À 0000	Á 00C1	Â 00C2	Ã 00C3	Ä 00C4	Å 00C5	Æ 00C6	Ç 00C7	È 00C8	É 00C9	Ê 00CA	Ë 00CB	Ì 00CC	Í 00CD	Î 00CE	Ϊ 00CF 207
D	Ð 00D0	Ñ 00D1 2 09	Ò 00D2 210	Ó 00D3	Ô 00D4	Õ 00D5	Ö 00D6	X 00D7 215	Ø 00D8	Ù 00D9	Ú 00DA 218	Û 00DB	Ü 00DC	Ý 00DD	þ 00DE	ß 00DF
E	à 00E0	á 00E1	â 00E2 226	ã 00E3	ä 00E4 228	å 00E5	æ 00E6 230	Ç 00E7 231	è 00E8	é 00E9	ê 00EA 234	ë 00EB) 00EC 236	Í 00ED 237	Î 00EE 238	Ϊ 00EF 239
F	ð 00F0 240	Ñ 00F1	Ò 00F2 242	Ó 00F3 243	Ô 00F4	Õ 00F5	Ö 00F6	÷ 00F7 247	Ø 00F8	00F9	Ú 00FA 250	00FB	Ü 00FC 252	ý 00FD 253	þ 00FE 254	ÿ 00FF 255

